

QUALITY ENABLES.



وحدة إزالة الأملاح
R.O. Unit

Case study about AlexFert fertilizer production, Egypt

QUALITY WORKS.

LANXESS
Energizing Chemistry

Efficient process water treatment with Lewabrane® RO B400 FR


Application and system design

Lewabrane® RO B400 FR elements are installed in the new BWRO plant of Egyptian fertilizer producer AlexFert in Alexandria, Egypt. The water treatment plant is fed with canal water (Nile river as origin) of seasonally variable TDS (300–550 mg/l). The water is pre-treated by coagulation, cold lime softening, and filtration. The RO plant consists of two trains, each of 120 m³/h feed stream and 74% recovery. A single train is composed of two stages in a 13:6 array with six elements per vessel. The RO units were placed into an existing water treatment plant, upstream of ion exchange full demineralization trains (SAC – WBA/SBA – MB, with Lewatit® MonoPlus resins).

At a glance


Industry	Chemical industry
Application	Process water
Location	Egypt
RO product	Lewabrane® RO B400 FR
Number of elements	228 pieces
IX product	Lewatit® MonoPlus SP 112 H Lewatit® MonoPlus MP 68 Lewatit® MonoPlus MP 500
Production capacity	5,750 m ³ /day
Water type	Surface water (Nile river)
Installation	February 2016

Water treatment process at AlexFert: combination of RO and IX

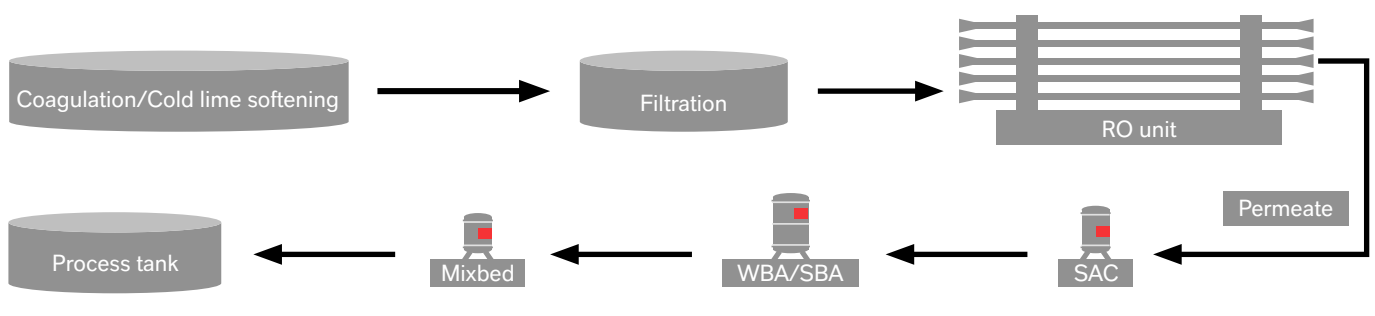

Membrane performance

From the beginning of their use, the **Lewabrane**[®] RO elements demonstrated their excellent salt rejection with up to 99.76% (at 20°C). This rejection leads to a permeate conductivity in the order of 3 to 5 µS/cm, which significantly reduces ionic load for the resins at the demineralization unit. While maintaining the demanded parameters of demineralized water, the cycle times of the demineralization trains are increased by up to four times (depending on season and with a possibility for further increase). Thus, the customer can reduce consumption of specific chemicals for resin bed regeneration by approx. 60%.

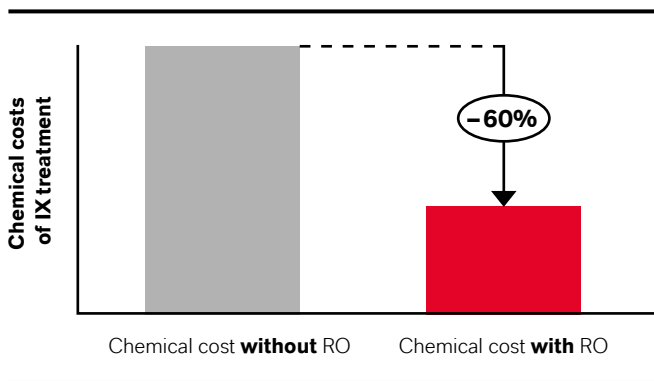

Conclusion

Lewabrane[®] RO B400 FR exhibits an excellent performance with the difficult Nile surface water. The measured rejection is above expectations. The combination of **Lewabrane**[®] RO B400 FR membranes and **Lewatit**[®] MonoPlus resins for demineralization leads not only to the requested final demineralized water conductivity below 0.08 µS/cm / 2 ppb SiO₂, but also to a stable and reliable process. Further-more, the new RO plant allows a reduction of specific chemical consumption of the resin bed due to less frequent regenerations.

We will be happy to support your business. Please contact us for additional information: visit www.lpt.lanxess.com

LANXESS
Energizing Chemistry

LANXESS Deutschland GmbH
Liquid Purification Technologies
Kennedyplatz 1
50569 Cologne, Germany

Phone: +49-221-8885-0
E-mail: lewabrane@lanxess.com

Health and Safety Information: Appropriate literature has been assembled which provides information concerning the health and safety precautions that must be observed when handling the LANXESS products mentioned in this publication. For materials mentioned which are not LANXESS products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be followed. Before working with any of these products, you must read and become familiar with the available information on their hazards, proper use and handling. This cannot be overemphasized. Information is available in several forms, e.g., material safety data sheets, product information and product labels. Consult your LANXESS representative in Germany or contact the Regulatory Affairs and Product Safety Department of LANXESS Deutschland GmbH or – for business in the USA – the LANXESS Corporation Product Safety and Regulatory Affairs Department in Pittsburgh, PA, USA.

Regulatory Compliance Information: Some of the end uses of the products described in this publication must comply with applicable regulations, such as the FDA, BIF, NSF, USDA, and CPSC. If you have any questions on the regulatory status of these products, contact – for business in the USA – the LANXESS Corporation Regulatory Affairs and Product Safety Department in Pittsburgh, PA, USA or for business outside US the Regulatory Affairs and Product Safety Department of LANXESS Deutschland GmbH in Germany. The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

All trademarks are trademarks of the LANXESS Group, unless otherwise specified. Status 09/2019.